

TWIGA PRO 600VFR/ 650VFR


- Precision Proportional Controls
- Three Point Linkage Mounting
- Left Hand or Right Hand Build Option
- Cushion Top Link
- LED Rear Lighting Kit
- Parallel Arm Geometry
- Variable Forward Reach Dipper Arm
- Totally Independent 66HP Hydraulic System
- Cast Iron Pumps and Motor
- Heavy Duty Cast Iron Gearbox
- Hydraulic Slew and Safety Breakaway
- Oil Cooler
- 220 Litre Oil Capacity
- 1.2 Metre MP2 Flailhead

Optional Extras

- Propilot Controls
- Remote Hydraulic Roller Adjustment
- Autopilot Control
- Belt Drive Flailhead
- Axle Mounting System
- Totally Independent 85HP Hydraulic System
- Quick Release Couplings
- Mechanical Quick Attach Bracket

MODEL	TWIGA PRO 600VR	TWIGA PRO 650VFR
Maximum reach	6.0m	6.5m
Machine weight*	1700kg	1750kg
Oil tank capacity	220ltr	220Ltr
Transport width	2.5m	2.5m
Gear totally independent hyd	STD	STD
3-point linkage-mounting	STD	STD
Axle mounting	Option	Option
Right hand or left hand build	Option	Option
LED lighting kit	STD	STD
Tractor power required**	120-150hp	140-150hp
Tractor weight required**	5000kg	6000kg

*Dependant on machine specification

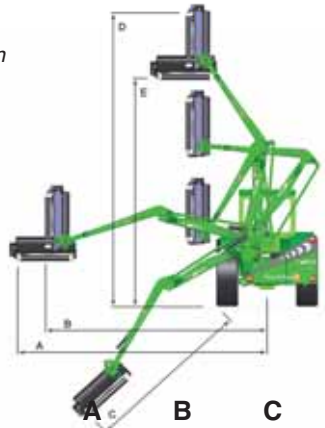

	A	B	C	D	E
TWIGA PRO 600VFR	6.0m	5.4m	4.2m	7.1m	5.6m
TWIGA PRO 650VFR	6.5m	5.9m	4.7m	7.6m	6.1m

TWIGA PRO Performance Pack



Flailhead can be tucked behind the wheel when in rearward position



0.9m Rearward reach for narrow lane cutting