

Spearhead



Tractor Requirements:

Twiga 560:
4000KG / 85HP

Twiga 650T:
4500KG / 85HP

TWIGA 560 / 650T

Features include:

- Maximum Reach:
TWIGA 560 - 5.60m (Fixed arm version)
TWIGA 650T - 6.50m (Telescopic arm version)
- 3 point linkage-mounting
- Sub-frame axle mounting option
- Parallel arm geometry
- High performance hydraulic system
- 150mm front offset on dipper arm
- 230° head rotation
- Hydraulic breakback with auto re-set
- Cushioned top link
- Rear LED lighting kit
- Hoses routed inside arms
- Head floatation
- Oil cooler
- Twin storage legs
- Choice of control systems (Cable and electric proportional)
- Choice of cutting attachments and accessories



150mm front offset



Rear LED lighting kit



Cushioned top link





Concealed hoses


Spearhead

New heavy duty flailhead


1.2m cutting width

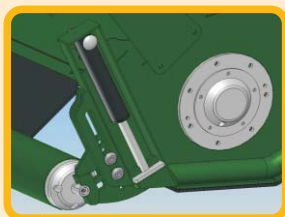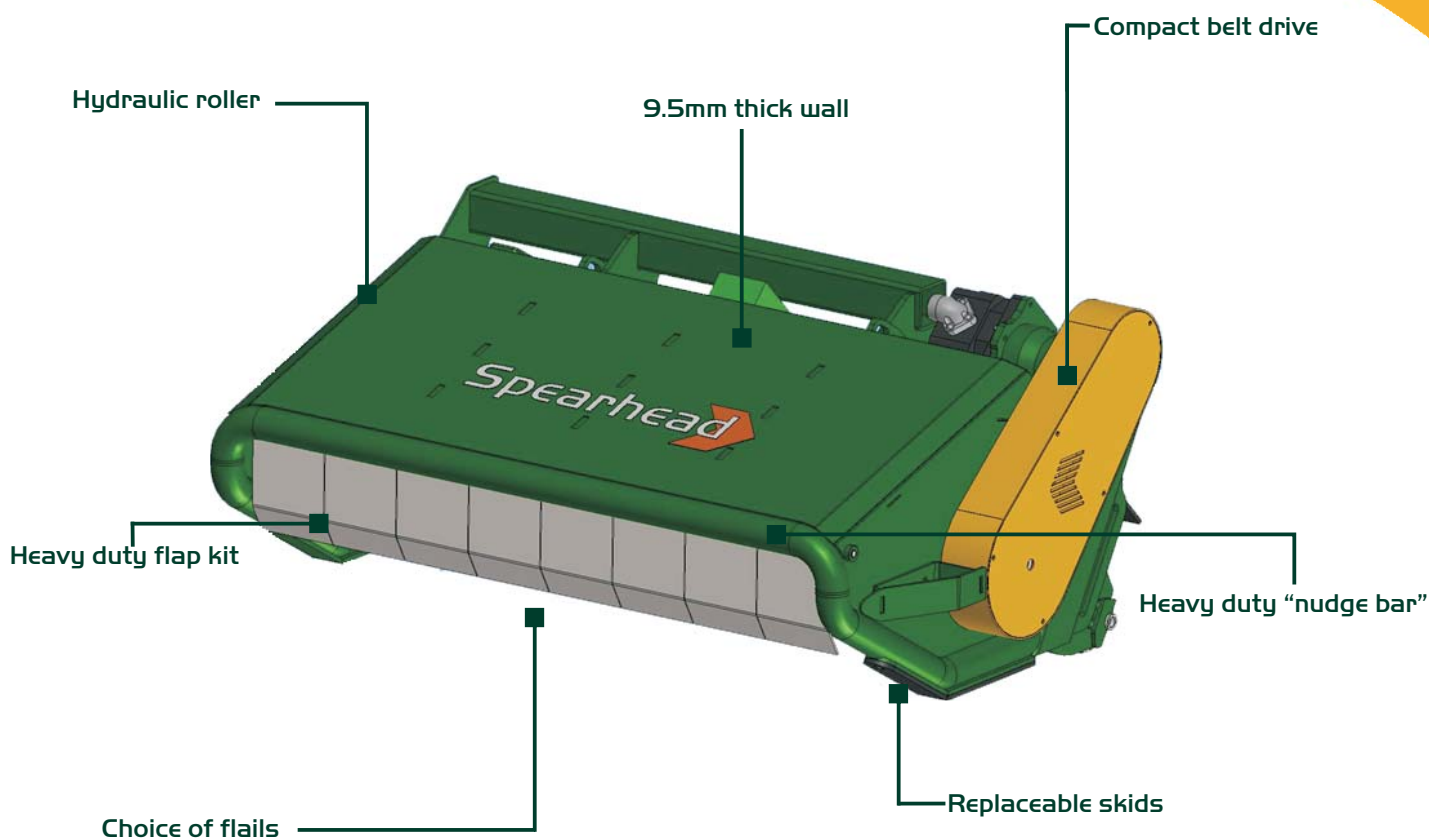

Hydraulic roller

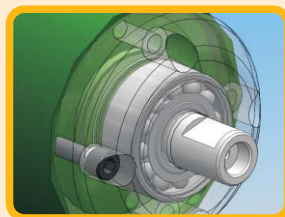

Self aligning roller bearings

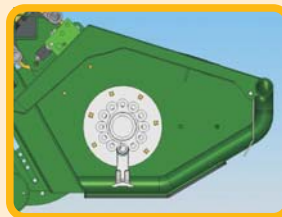

Front "nudge bar"



New heavier "T" flail